




ELEVATION



PLAN

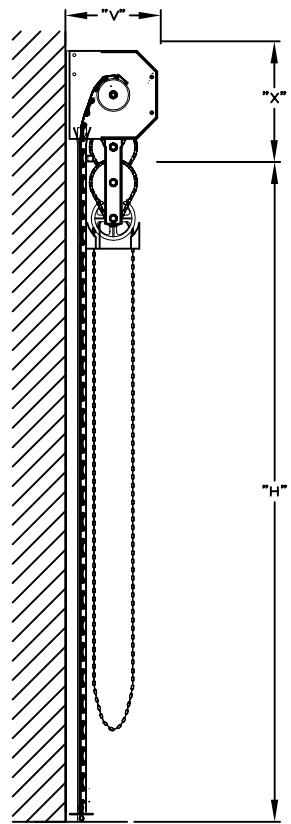


SECTION A - A

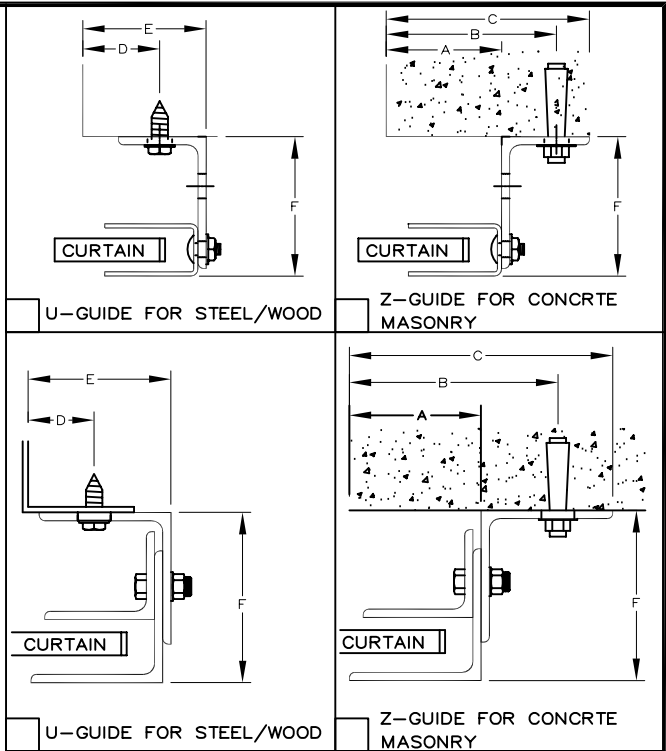

GUIDE TYPE	A"	B"	C"	D"	E"	F"
1	2 5/8	3 3/8	4 5/8	1 9/16	2 13/16	3 5/16
2	2 5/8	3 7/16	5 1/4	1	2 13/16	3 15/16
3	2 5/8	4 3/8	5 5/8	1 1/16	2 13/16	4 3/8
4	2 5/8	4 3/8	5 5/8	1 1/8	2 7/8	4 3/4

- GENERAL NOTES**
- * SLATS/HOOD: GALVANIZED STEEL WITH BAKED ON EPOXY PRIMER AND POLYESTER TOP COAT.
 - * OTHER SURFACES: SHOP COAT PRIMER
 - * OPERATION: RIGHT HAND SHOWN, LEFT HAND OPPOSITE
 - * 2 PC. GUIDES ARE USED UP TO 14' X 14' OPENING, 24 GA. ONLY.
 - * 3 PC. GUIDES PERTAIN TO GUIDE TYPE 2, 3, AND 4

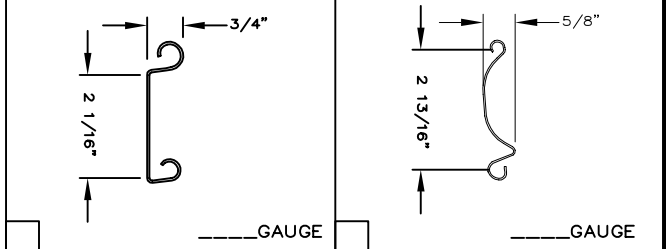

01-22-02

400-STANDARD

MDL.	QTY.	OPENING SIZE		OPERATION	RH LH	CLEARANCES		OPTION	PROJECT:							
		WIDTH "W"	HEIGHT "H"			"X"	"V"		ARCHITECT:	CONTRACTOR:	DISTRIBUTOR:	DATE:	SHEET: OF:	BY:	REF. #.	



400 Series - Rolling Steel Service Door

NOTE: Porvene Doors is not responsible for improper installation procedures, structural backing, and field inspections of the project itself.

APPROVAL SIGNATURE: _____ DATE: _____