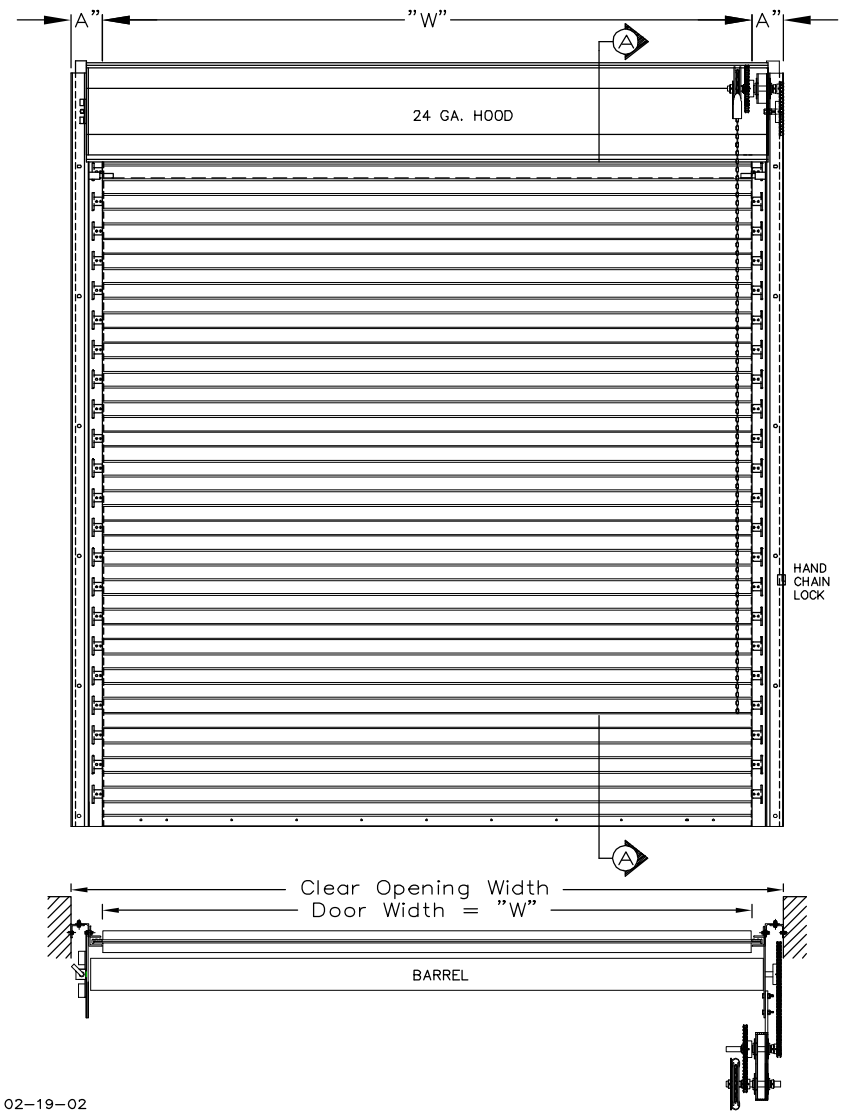

02-19-02

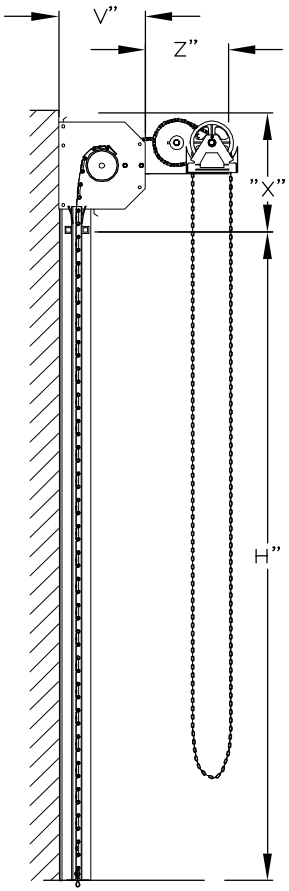

SECTION A-A

600-BETWEENJAMB

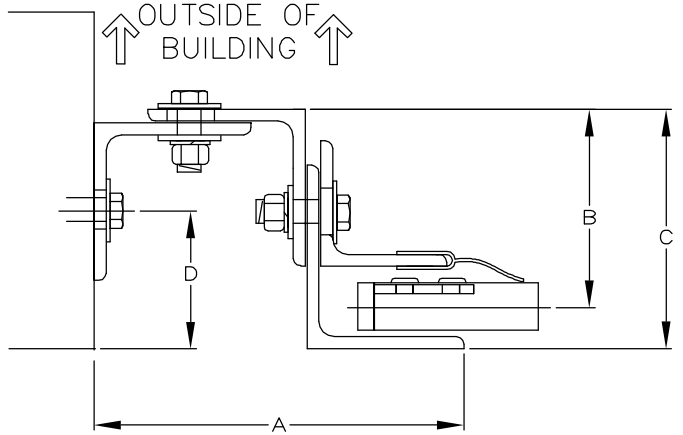

GUIDE TYPE	A"	B"	C"	D"
2	6"	3 1/4"	3 15/16"	2"
4	6 1/2"	4"	4 3/4"	2 1/2"

GENERAL NOTES

* ENVIRONMENTALLY SAFE POLYISOCYANNURATE INSULATING MATERIAL HOUSED BETWEEN A 22 GA. FRONT SLAT AND A 24 GA. BACK SLAT.
* SLATS/HOOD: GALVANIZED STEEL WITH BAKED ON EPOXY PRIMER & POLYESTER TOP COAT.
* OTHER SURFACES: SHOP COAT PRIMER
* OPERATION: RIGHT HAND SHOWN, LEFT HAND OPPOSITE
* OUTER ANGLE WITH VINYL WEATHERSEAL. FOR GUIDE SELECTION CONTACT ENGINEERING OR CUSTOMER SERVICE. FOR MALLEABLE ENDLOCKS ADD 3/8" TO A, B, C, D & E
* A HOOD IS SUPPLIED AS STANDARD WITH AN 8" P.V.C. BAFFLE, PROVIDING WEATHERSEAL AT THE TOP OF DOOR.

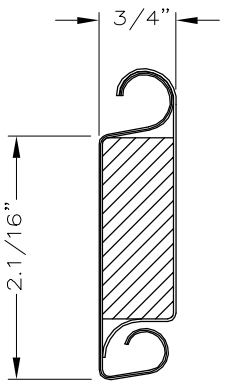

22/24 GAGE

MDL.	QTY.	OPENING SIZE		OPERATION	RH	CLEARANCES		OPTION
		WIDTH "W"	HEIGHT "H"		LH	"X"	"V"	

PROJECT:
ARCHITECT:
CONTRACTOR:
DISTRIBUTOR:
DATE: SHEET: OF:

PORVENE® DOORS
MORENO VALLEY, CA 92553
(951) 653-3727

BY: REF. #.

600 SERIES - STEEL BACKED INSULATED BETWEEN JAMB DOOR

NOTE: Porvene Doors is not responsible for improper installation procedures, structural backing, and field inspections of the project itself.

APPROVAL SIGNATURE: DATE: