



TOP MOTOR CLEARANCE			
HP	14"	16"	22"
Z	9"	8"	5"

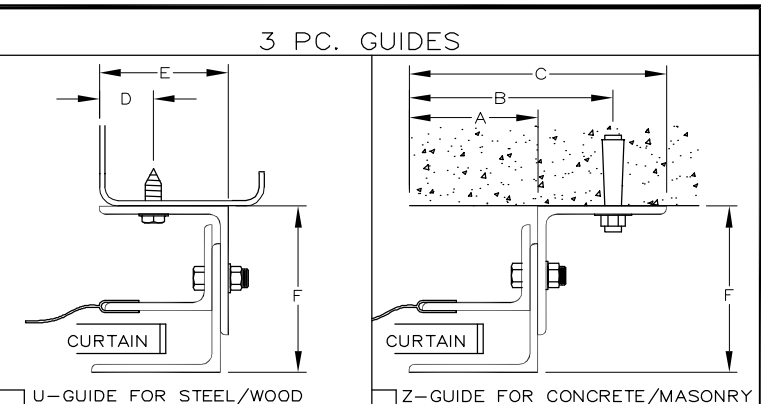

GUIDE TYPE	A"	B"	C"	D"	E"	F"
2	2 5/8	3 7/16	5 1/4	1	2 13/16	3 15/16
4	2 5/8	4 3/8	5 5/8	1 1/2	2 7/8	4 3/4

- GENERAL NOTES**
- \* ENVIRONMENTALLY SAFE POLYISOCYANURATE INSULATING MATERIAL HOUSED BETWEEN A 22 GA. FRONT SLAT AND A 24 GA. BACK SLAT.
  - \* SLATS/HOOD: GALVANIZED STEEL WITH BAKED ON EPOXY PRIMER & POLYESTER TOP COAT.
  - \* OTHER SURFACES: SHOP COAT PRIMER
  - \* OPERATION: RIGHT HAND SHOWN, LEFT HAND OPPOSITE
  - \* OUTER ANGLE WITH VINYL WEATHERSEAL. FOR GUIDE SELECTION CONTACT ENGINEERING OR CUSTOMER SERVICE. FOR MALLEABLE ENDLOCKS ADD 3/8" TO A, B, C, D & E
  - \* A HOOD IS SUPPLIED AS STANDARD WITH AN 8" P.V.C. BAFFLE, PROVIDING WEATHERSEAL AT THE TOP OF DOOR.

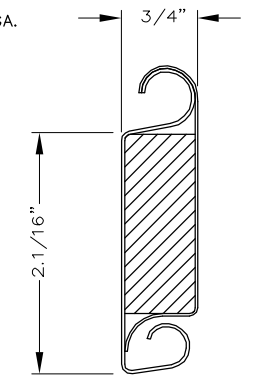

22 / 24 GAGE

QTY.	OPENING SIZE		OPERATION	RH LH	CLEARANCES		OPTION	PROJECT:	ARCHITECT:	CONTRACTOR:	DISTRIBUTOR:	DATE:	SHEET:	OF:	BY:	REF. #.
	WIDTH "W"	HEIGHT "H"			"X"	"V"										



**622/24- Therm-Master Insulated Steel-backed Door/GH Motor**

NOTE: Porvене Doors is not responsible for improper installation procedures, structural backing, and field inspections of the project itself.

APPROVAL SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_